

# NOXAC-432

4" AC Onyx LED Retrofit Baffle

Source: 10.5W or 15W

Up to 700lm or 1000lm

## PRODUCT DESCRIPTION

4" AC Onyx Retrofit Series requires no driver and allow for a sleek design. Spun aluminum construction provides clean sharp edges and is suitable for use with most 4" recessed housings. Deep regressed optics and round aperture deliver even and glare-free illumination.

## FEATURES

- Up to 700 or 1000 delivered lumens
- 2700K, 3000K, 3500K, 4000K or 5000K @ 90+ CRI
- Dimmable AC LED
- Includes medium base socket adapter for easy retrofitting in 4" recessed housings
- Quick connector is compatible with dedicated LED housings
- 5-year limited warranty
- Classified for wet locations
- ENERGY STAR certified

## SPECIFICATION

**Reflector:** One piece, spun aluminum construction dissipates heat and extends life. Unitized Thermal Management, UTM, provides exceptional cool operation.

**Mounting:** Two steel, spring mounting blades allow for easy and secure mounting in most 4" housings.

**Retrofit:** Luminaires include a medium base screw-socket adapter ([NRA-211SM](#)) for retrofitting into medium base downlight housings. Intended to be used as a LED lamp replacement. GU24 socket adapter ([NRA-212SM](#)) is available.

| ELECTRICAL        | (blank)             | /HL                               |
|-------------------|---------------------|-----------------------------------|
| Input Voltage     | 120VAC              |                                   |
| Frequency         | 60Hz                |                                   |
| Input Power       | 10.5W               | 15W                               |
| Color Temperature | 3500K, 4000K, 5000K | 2700K, 3000K, 3500K, 4000K, 5000K |
| Dimming           | Triac / ELV         |                                   |
| Operating Temp.   | 35°C max.           | 25°C max.                         |

## COMPATIBLE HOUSINGS

Onyx retrofits are compatible with most 4" IC and Non-IC housings by Nora and others.

### Fire Box

- [NFJB-R4\\*](#) ICAT Junction Box (700lm only)
- [NFBIC-4LMRATA\\*](#) IC Air-Tight Dedicated LED Firebox
- [NFBIC-427LMRATA\\*](#) Shallow ICAT Dedicated LED Firebox
- [NFBIC-4INCATA](#) IC Air-Tight Line Voltage Firebox

### New Construction

- [NHIC-4LMRAT\\*](#) IC Air-Tight Dedicated LED
- [NHIC-4LMRAT/277\\*](#) ICAT Dedicated LED, 277V (includes step-down transformer)
- [NHICCP-4LMRAT\\*](#) Chicago Plenum Dedicated LED
- [NHIC-427LMRAT\\*](#) Shallow IC Air-Tight Dedicated LED
- [NSIC-401QAT](#) IC Air-Tight Line Voltage
- [NS-401QAT](#) Air-Tight Line Voltage
- [NHIC-4G24AT](#) IC Air-Tight GU24

### Remodel

- [NHRIC-4LMRAT\\*](#) IC Air-Tight Dedicated LED
- [NHRIC-427LMRAT\\*](#) Shallow IC Air-Tight Dedicated LED
- [NSR-404QAT](#) Air-Tight Line Voltage
- [NSRIC-404QAT](#) IC Air-Tight Line Voltage

\* Nora LED Dedicated housings are listed for use only with Nora LED Retrofits.

## ACCESSORIES

- [NOX-4EYELIDW](#): White round eyelid used to convert round reflector or baffle to half moon wall wash trim.
- [NOX-4OR-W](#): White round oversize ring used to cover ceiling cut-outs up to 5-7/8".

## LABELS AND LISTINGS

- 700lm luminaires are cULus classified for Wet Locations
- 1000lm luminaires are cETLus classified for Wet Locations
- ENERGY STAR certified
- [5-Year Limited Warranty](#)
- Meets ASTM-E283 Air-Tight requirements
- FCC compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2022



Type

Project

Catalog No.




Notes

## Performance Data

| Part Number          | (blank) Lumens | /HL Lumens | CCT   |
|----------------------|----------------|------------|-------|
| <b>NOXAC-43127WW</b> | -              | 971lm      | 2700K |
| <b>NOXAC-43130WW</b> | -              | 952lm      | 3000K |
| <b>NOXAC-43135WW</b> | 723lm          | 969lm      | 3500K |
| <b>NOXAC-43140WW</b> | 714lm          | 1025lm     | 4000K |
| <b>NOXAC-43150WW</b> | 733lm          | 1018lm     | 5000K |

*Delivered lumens will vary depending on trim type*

## PRODUCT IMAGES AND DIMENSIONS

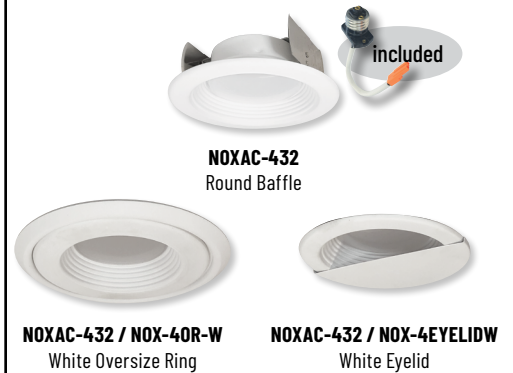

## 4" AC Onyx LED Retrofit Baffle

Lumens / Wattage / Color Temperature / Finish

- NOXAC-43235WW** = 723lm / 10.5W / 3000K, White
- NOXAC-43240WW** = 714lm / 10.5W / 3000K, White
- NOXAC-43250WW** = 733lm / 10.5W / 3000K, White
- NOXAC-43227WW/HL** = 971lm / 15W / 2700K, White
- NOXAC-43230WW/HL** = 952lm / 15W / 3000K, White
- NOXAC-43235WW/HL** = 969lm / 15W / 3500K, White
- NOXAC-43240WW/HL** = 1025lm / 15W / 4000K, White
- NOXAC-43250WW/HL** = 1018lm / 15W / 5000K, White

## Optional Accessories

Description

- NOX-4EYELIDW** = 4" Round White Eyelid
- NOX-4OR-W** = 4" Round White Oversize Ring
- NRA-211SM** = Medium base screw-in socket (included w/ each)
- NRA-212SM** = Socket adapter for use with GU24 housings

Example: **NOXAC-43230WW/HL** = 4" AC Onyx LED Round Retrofit Baffle, 3000K, White Baffle / White Flange, 952lm / 15W

# NOXAC-432

## 4" AC Onyx LED Retrofit Baffle Accessories

|             |       |
|-------------|-------|
| Type        | _____ |
| Project     | _____ |
| Catalog No. | _____ |
| Notes       | _____ |



Onyx Eyelid

**NOX-4EYELIDW**

Round eyelid clips on reflector or baffle to convert into half moon wall wash.

White



Onyx Oversize Ring

**NOX-4OR-W**

Round oversize ring covers large ceiling cut-outs up to 5-7/8".

White



Medium Base Screw-In Socket

**NRA-211SM**

Medium base screw-in socket adapter for retrofitting into existing medium base housings. One is included with each luminaire.



Socket Adapter for GU24 Housings

**NRA-212SM**

GU24 socket adapter for retrofitting into existing GU24 housings.